



BROADCAST ENGINEER'S HANDBOOK

A collection of useful reference data
for TV broadcasting engineers

© ABE Elettronica S.p.A. Oct. 1999

ABE ELETTRONICA S.p.A.

Via Leonardo da Vinci, 92 - 24043 CARAVAGGIO (BG), Italy

Tel. +39-0363-351007, Fax +39-0363-50756

WEB SITE: <http://www.abe.it> E-mail: mail@abe.it



INDEX

| | Page |
|---|------|
| VHF Channel definitions | 3 |
| UHF Channel definitions | 10 |
| Basic standards for TV transmission | 15 |
| Minimum field strength for which protection may be sought in planning a television service | 17 |
| Boundaries of the television service area in rural districts having a low population density | 18 |
| CO-Channel interference | 19 |
| Frequency offset conditions | 21 |
| Directivity of antennas in the reception of television broadcasting | 24 |
| Microwave radiation exposure - principal safety standards | 25 |
| Coaxial cables | 27 |
| Wave guides | 28 |
| TV analogue microwave links | 29 |
| VSWR vs. Return loss (dB) | 30 |
| Half wave dipole vs. isotropic dipole | 30 |
| Relationship between dBm, W, dBmV, V | 31 |
| Cable size vs. maximum current | 32 |
| Conversion factors | 33 |
| Useful formulae | 35 |
| Useful RF calculation | 37 |

The material contained in this handbook has been collected from a number of sources.
ABE Elettronica S.p.A. accepts no responsibility for errors or omissions.



VHF Channel definitions

| BAND | CHANNEL | CHANNEL LIMITS (MHZ) | VISION CARRIER | SOUND CARRIER |
|--------------------------------------|---------|----------------------|----------------|---------------|
| <i>Standard B (7 Mhz), Australia</i> | | | | |
| IF | - | 33.15 to 40.15 | 38.9 | 33.4 |
| I | 0 | 45 to 52 | 46.25 | 51.75 |
| | 1 | 56 to 63 | 57.25 | 62.75 |
| | 2 | 63 to 70 | 64.25 | 69.75 |
| (II) | 3 | 85 to 92 | 86.25 | 91.75 |
| | 4 | 94 to 101 | 95.25 | 100.75 |
| | 5 | 101 to 108 | 102.25 | 107.75 |
| | 5A | 137 to 144 | 138.25 | 143.25 |
| III | 6 | 174 to 181 | 175.25 | 180.75 |
| | 7 | 181 to 188 | 182.25 | 187.75 |
| | 8 | 188 to 195 | 189.25 | 194.75 |
| | 9 | 195 to 202 | 196.25 | 201.75 |
| | 10 | 208 to 215 | 209.25 | 214.75 |
| | 11 | 215 to 222 | 216.25 | 221.75 |
| <i>Standard B (7 Mhz), Europe</i> | | | | |
| IF | - | 33.15 to 40.15 | 38.9 | 33.4 |
| I | E 2 | 47 to 54 | 48.25 | 53.75 |
| | E 3 | 54 to 61 | 55.25 | 60.75 |
| | E 4 | 61 to 68 | 62.25 | 67.75 |
| III | E 5 | 174 to 181 | 175.25 | 180.75 |
| | E 6 | 181 to 188 | 182.25 | 187.75 |
| | E 7 | 188 to 195 | 189.25 | 194.75 |
| | E 8 | 195 to 202 | 196.25 | 201.75 |
| | E 9 | 202 to 209 | 203.25 | 208.75 |
| | E 10 | 209 to 216 | 210.25 | 215.75 |
| | E 11 | 216 to 223 | 217.25 | 222.75 |
| | E 12 | 223 to 230 | 224.25 | 229.75 |



| BAND | CHANNEL | CHANNEL LIMITS (MHZ) | VISION CARRIER | SOUND CARRIER |
|---|-------------------------------------|----------------------|----------------|---------------|
| <i>Standard B (7 Mhz), Europe</i> | | | | |
| <i>Special cable TV channels (CATV)</i> | | | | |
| IF | - | 33.15 to 40.15 | 38.9 | 33.4 |
| <III Su lower ATV bands | S 2 | 113 to 123 | digital sound | |
| | S 3 | 113 to 123 | broadcasting | |
| | S 4 | 125 to 132 | 126.25 | 131.75 |
| | S 5 | 132 to 139 | 133.25 | 138.75 |
| | S 6 | 139 to 146 | 140.25 | 145.75 |
| | S 7 | 146 to 153 | 147.25 | 152.75 |
| | S 8 | 153 to 160 | 154.25 | 159.75 |
| | S 9 | 160 to 167 | 161.25 | 166.75 |
| | S 10 | 167 to 174 | 168.25 | 173.75 |
| | >III So upper ATV bands | S 11 | 230 to 237 | 231.25 |
| S 12 | | 237 to 244 | 238.25 | 243.75 |
| S 13 | | 244 to 251 | 245.25 | 250.75 |
| S 14 | | 251 to 258 | 252.25 | 257.75 |
| S 15 | | 258 to 265 | 259.25 | 264.75 |
| S 16 | | 265 to 272 | 266.25 | 271.75 |
| S 17 | | 272 to 279 | 273.25 | 278.75 |
| S 18 | | 279 to 286 | 280.25 | 285.25 |
| S 19 | | 286 to 293 | 287.25 | 292.75 |
| S 20 | | 293 to 300 | 294.25 | 299.75 |
| <i>Standard B (7 Mhz), Italy</i> | | | | |
| IF | - | 33.15 to 40.15 | 38.9 | 33.4 |
| I | A | 52.5 to 59.5 | 53.75 | 59.25 |
| | B | 61 to 68 | 62.25 | 67.75 |
| (II) | C | 81 to 88 | 82.25 | 87.75 |
| (III) | D | 174 to 181 | 175.25 | 180.75 |
| | E | 182.5 to 189.5 | 183.75 | 189.25 |
| | F | 191 to 198 | 192.25 | 197.75 |
| | G | 200 to 207 | 201.25 | 206.75 |
| | H | 209 to 216 | 210.25 | 215.75 |
| | H1 | 216 to 223 | 217.25 | 222.75 |
| | H2 | 223 to 230 | 224.25 | 229.75 |



| BAND | CHANNEL | CHANNEL LIMITS (MHZ) | VISION CARRIER | SOUND CARRIER |
|---|---------|----------------------|----------------|---------------|
| <i>Standard B (7 Mhz), Marocco</i> | | | | |
| IF | - | 33.15 to 40.15 | 38.9 | 33.4 |
| | M 4 | 162 to 169 | 163.25 | 168.75 |
| | M 5 | 170 to 177 | 171.25 | 176.75 |
| | M 6 | 178 to 185 | 179.25 | 184.75 |
| III | M 7 | 186 to 193 | 187.25 | 192.75 |
| | M 8 | 194 to 201 | 195.25 | 200.75 |
| | M 9 | 202 to 209 | 203.25 | 208.75 |
| | M 10 | 210 to 217 | 211.25 | 216.75 |
| <i>Standard B (7 Mhz), New Zealand</i> | | | | |
| IF | - | 33.15 to 40.15 | 38.9 | 33.4 |
| | 1 | 44 to 51 | 45.25 | 50.75 |
| I | 2 | 54 to 61 | 55.25 | 60.75 |
| | 3 | 61 to 68 | 62.25 | 67.75 |
| | 4 | 174 to 181 | 175.25 | 180.75 |
| | 5 | 181 to 188 | 182.25 | 187.75 |
| | 6 | 188 to 195 | 189.25 | 194.75 |
| III | 7 | 195 to 202 | 196.25 | 201.75 |
| | 8 | 202 to 209 | 203.25 | 208.75 |
| | 9 | 209 to 216 | 210.25 | 215.75 |
| | 10 | 216 to 223 | 217.25 | 222.75 |
| <i>Standard D (8 Mhz), China (Peoples Rep.)</i> | | | | |
| IF | - | 31.25 to 39.25 | 38.0 | 31.5 |
| | 1 | 48.5 to 56.5 | 49.75 | 56.25 |
| | 2 | 56.5 to 64.5 | 57.75 | 64.25 |
| I | 3 | 64.5 to 72.5 | 65.75 | 72.25 |
| | 4 | 76.0 to 84.0 | 77.25 | 83.75 |
| | 5 | 84.0 to 92.0 | 85.25 | 91.75 |
| | 6 | 167 to 175 | 168.25 | 174.75 |
| | 7 | 175 to 183 | 176.25 | 182.75 |
| | 8 | 183 to 191 | 184.25 | 190.75 |
| III | 9 | 191 to 199 | 192.25 | 198.75 |
| | 10 | 199 to 207 | 200.25 | 206.75 |
| | 11 | 207 to 215 | 208.25 | 214.75 |



| BAND | CHANNEL | CHANNEL LIMITS (MHZ) | VISION CARRIER | SOUND CARRIER |
|---|---------|----------------------|----------------|---------------|
| <i>Standard D (8 Mhz), China (Peoples Rep.)</i> | | | | |
| | 12 | 215 to 223 | 216.25 | 222.75 |
| <i>Standard D (8 Mhz), OIRT</i> | | | | |
| IF* | - | 32.15 to 40.15 | 38.9 | 32.4 |
| <i>*UdSSR: 31.25 to 39.25/38.0/31.5 Mhz</i> | | | | |
| I | R I | 48.5 to 56.5 | 49.75 | 56.25 |
| | R II | 58 to 66 | 59.25 | 65.75 |
| | R III | 76 to 84 | 77.25 | 83.75 |
| (II) | R IV | 84 to 92 | 85.25 | 91.75 |
| | R V | 92 to 100 | 93.25 | 99.75 |
| III | R VI | 174 to 182 | 175.25 | 181.75 |
| | R VII | 182 to 190 | 183.25 | 189.75 |
| | R VIII | 190 to 198 | 191.25 | 197.75 |
| | R IX | 198 to 206 | 199.25 | 205.75 |
| | R X | 206 to 214 | 207.25 | 213.75 |
| | R XI | 214 to 222 | 215.25 | 221.75 |
| | R XII | 222 to 230 | 223.25 | 229.75 |
| <i>Standard I (8 Mhz), Ireland</i> | | | | |
| IF | - | 32.15 to 40.15 | 38.9* | 32.9* |
| <i>*Gr.-Brit. Also 39.5 and 33.5 Mhz resp.</i> | | | | |
| I | I A | 44.5 to 52.5 | 45.75 | 51.75 |
| | I B | 52.5 to 60.5 | 53.75 | 59.75 |
| | I C | 60.5 to 68.5 | 61.75 | 67.75 |
| III | I D | 174 to 182 | 175.25 | 181.25 |
| | I E | 182 to 190 | 183.25 | 189.25 |
| | I F | 190 to 198 | 191.25 | 197.75 |
| | I G | 198 to 206 | 199.25 | 205.25 |
| | I H | 206 to 214 | 207.25 | 213.25 |
| | I J | 214 to 222 | 215.25 | 221.25 |



| BAND | CHANNEL | CHANNEL LIMITS (MHZ) | VISION CARRIER | SOUND CARRIER |
|---|---------|----------------------|----------------|---------------|
| <i>Standard I (8 Mhz), South Africa</i> | | | | |
| IF | - | 32.15 to 40.15 | 38.9 | 32.9 |
| III | 4 | 174 to 182 | 175.25 | 181.25 |
| | 5 | 182 to 190 | 183.25 | 189.25 |
| | 6 | 190 to 198 | 191.25 | 197.25 |
| | 7 | 198 to 206 | 199.25 | 205.25 |
| | 8 | 206 to 214 | 207.25 | 213.25 |
| | 9 | 214 to 222 | 215.25 | 221.25 |
| | 10 | 222 to 230 | 223.25 | 229.25 |
| | 11 | 230 to 238 | 231.25 | 237.25 |
| | (12) | 238 to 246 | not defined | |
| | 13 | 246 to 254 | 247.43 | 253.43 |

Standard K1 (8 Mhz)

French Overseas Post and Telecommunication Agency

| | | | | |
|-------------------------------|---|----------------|--------|--------|
| IF | - | 31.45 to 39.45 | 32.7 | 39.2* |
| <i>*Also 38.9 or 32.7 Mhz</i> | | | | |
| III | 4 | 174 to 182 | 175.25 | 181.75 |
| | 5 | 182 to 190 | 183.25 | 189.75 |
| | 6 | 190 to 198 | 191.25 | 197.75 |
| | 7 | 198 to 206 | 199.25 | 205.75 |
| | 8 | 206 to 214 | 207.25 | 213.75 |
| | 9 | 214 to 222 | 215.25 | 221.75 |

Standard L (8 Mhz), France

| | | | | |
|-------------------------------|-----|----------------|-------|-------|
| IF | - | 31.45 to 39.45 | 32.7 | 39.2* |
| <i>*Also 38.9 or 32.7 Mhz</i> | | | | |
| I | A | 41 to 49 | 47.75 | 41.25 |
| | B | 49 to 57 | 55.75 | 49.25 |
| | C | 57 to 65 | 63.75 | 57.25 |
| | C 1 | 53.75 to 61.75 | 60.50 | 54.00 |



| BAND | CHANNEL | CHANNEL LIMITS (MHZ) | VISION CARRIER | SOUND CARRIER |
|-----------------------------------|---------|----------------------|----------------|---------------|
| <i>Standard L (8 Mhz), France</i> | | | | |
| III | 1 | 174.75 to 182.75 | 176.0 | 182.50 |
| | 2 | 182.75 to 190.75 | 184.0 | 190.50 |
| | 3 | 190.75 to 198.75 | 192.0 | 198.50 |
| | 4 | 198.75 to 206.75 | 200.0 | 206.50 |
| | 5 | 206.75 to 214.75 | 208.0 | 214.50 |
| | 6 | 214.75 to 222.75 | 216.0 | 222.50 |
| <i>Standard M (6 Mhz), Japan</i> | | | | |
| IF | - | 41.0 to 47.0 | 38.9 | 41.25 |
| (II) | J 1 | 90 to 96 | 91.25 | 95.75 |
| | J 2 | 96 to 102 | 97.25 | 101.75 |
| | J 3 | 102 to 108 | 103.25 | 107.75 |
| | J 4 | 170 to 176 | 171.25 | 175.75 |
| | J 5 | 176 to 182 | 177.25 | 181.75 |
| | J 6 | 182 to 188 | 183.25 | 187.75 |
| | J 7 | 188 to 194 | 189.25 | 193.75 |
| Channel spacing 4 Mhz | | | | |
| III | J 8 | 192 to 198 | 193.25 | 197.75 |
| Channel spacing 4 Mhz | | | | |
| | J 9 | 198 to 204 | 199.25 | 203.75 |
| | J 10 | 204 to 210 | 205.25 | 209.75 |
| | J 11 | 210 to 216 | 211.25 | 215.75 |
| | J 12 | 216 to 222 | 217.25 | 221.75 |
| <i>Standard M,N (6 Mhz), USA</i> | | | | |
| IF | - | 41.0 to 47.0 | 45.75 | 41.25 |
| I | A 02 | 54 to 60 | 55.25 | 59.75 |
| | A 03 | 60 to 66 | 61.25 | 65.75 |
| | A 04 | 66 to 72 | 67.25 | 71.75 |
| | A 05 | 76 to 82 | 77.25 | 81.75 |
| | A 06 | 82 to 88 | 83.25 | 87.75 |



| BAND | CHANNEL | CHANNEL LIMITS (MHZ) | VISION CARRIER | SOUND CARRIER |
|----------------------------------|---------|----------------------|----------------|---------------|
| <i>Standard M,N (6 Mhz), USA</i> | | | | |
| III | A 07 | 174 to 180 | 175.25 | 179.75 |
| | A 08 | 180 to 186 | 181.25 | 185.75 |
| | A 09 | 186 to 192 | 187.25 | 191.75 |
| | A 10 | 192 to 198 | 193.25 | 197.75 |
| | A 11 | 198 to 204 | 199.25 | 203.75 |
| | A 12 | 204 to 210 | 205.25 | 209.75 |
| | A 13 | 210 to 216 | 211.25 | 215.75 |



UHF Channel definitions

| BAND | CHANNEL | | CHANNEL LIMITS MHZ | VISION CARRIER | SOUND CARRIER MHZ | | |
|---|---------|------|---------------------------------------|----------------|-------------------|--------|--------|
| | EU | Chi | | | G,H | I | K,L |
| <i>Standards G,H,I,K,L (CCIR standards;8 Mhz)</i> | | | | | | | |
| IF | - | - | same of VHF for corresponding country | | | | |
| IV | 21 | 13 | 470 to 478 | 471.25 | 476.25 | 477.25 | 477.75 |
| | 22 | 14 | 478 to 486 | 479.25 | 484.75 | 485.25 | 485.75 |
| | 23 | 15 | 486 to 494 | 487.25 | 492.75 | 493.25 | 493.75 |
| | 24 | 16 | 494 to 502 | 495.25 | 500.75 | 501.25 | 501.75 |
| | 25 | 17 | 502 to 510 | 503.25 | 508.75 | 509.25 | 509.75 |
| | 26 | 18 | 510 to 518 | 511.25 | 516.75 | 517.25 | 517.75 |
| | 27 | 19 | 518 to 526 | 519.25 | 524.75 | 525.25 | 525.75 |
| | 28 | 20 | 526 to 534 | 527.25 | 532.75 | 533.25 | 533.75 |
| | 29 | 21 | 534 to 542 | 535.25 | 540.75 | 541.25 | 541.75 |
| | 30 | 22 | 542 to 550 | 543.25 | 548.75 | 549.25 | 549.75 |
| | 31 | 23 | 550 to 558 | 551.25 | 556.75 | 557.25 | 557.75 |
| | 32 | 24 | 558 to 566 | 559.25 | 564.75 | 565.25 | 565.75 |
| | 33 | | 566 to 574 | 567.25 | 572.75 | 573.25 | 573.75 |
| | 34 | not | 574 to 582 | 575.25 | 580.75 | 581.25 | 581.75 |
| | 35 | defi | 582 to 590 | 583.25 | 588.75 | 589.25 | 589.75 |
| | 36 | ned | 590 to 598 | 591.25 | 596.75 | 597.25 | 597.75 |
| | 37 | | 598 to 606 | 599.25 | 604.75 | 605.25 | 605.75 |
| V | 38 | 25 | 606 to 614 | 607.25 | 612.75 | 613.25 | 613.75 |
| | 39 | 26 | 614 to 622 | 615.25 | 620.75 | 621.25 | 621.75 |
| | 40 | 27 | 622 to 630 | 623.25 | 628.75 | 629.25 | 629.75 |
| | 41 | 28 | 630 to 638 | 631.25 | 636.75 | 637.25 | 637.75 |
| | 42 | 29 | 638 to 646 | 639.25 | 644.75 | 645.25 | 645.75 |
| | 43 | 30 | 646 to 654 | 647.25 | 652.75 | 653.25 | 653.75 |
| | 44 | 31 | 654 to 662 | 655.25 | 660.75 | 661.25 | 661.75 |
| | 45 | 32 | 662 to 670 | 663.25 | 668.75 | 669.25 | 669.75 |
| | 46 | 33 | 670 to 678 | 671.25 | 676.75 | 677.25 | 677.75 |
| | 47 | 34 | 678 to 686 | 679.25 | 684.75 | 685.25 | 685.75 |
| | 48 | 35 | 686 to 694 | 687.25 | 692.75 | 693.25 | 693.75 |
| | 49 | 36 | 694 to 702 | 695.25 | 700.75 | 701.25 | 701.75 |



| BAND | CHANNEL | | CHANNEL LIMITS MHZ | VISION CARRIER | SOUND CARRIER MHZ | | |
|---|---------|-----|--------------------|----------------|-------------------|--------|--------|
| | EU | Chi | | | G,H | I | K,L |
| <i>Standards G,H,I,K,L (CCIR standards;8 Mhz)</i> | | | | | | | |
| V | 50 | 37 | 702 to 710 | 703.25 | 708.75 | 709.25 | 709.75 |
| | 51 | 38 | 710 to 718 | 711.25 | 716.75 | 717.25 | 717.75 |
| | 52 | 39 | 718 to 726 | 719.25 | 724.75 | 725.25 | 725.75 |
| | 53 | 40 | 726 to 734 | 727.25 | 732.75 | 733.25 | 733.75 |
| | 54 | 41 | 734 to 742 | 735.25 | 740.75 | 741.25 | 741.75 |
| | 55 | 42 | 742 to 750 | 743.25 | 748.75 | 749.25 | 749.75 |
| | 56 | 43 | 750 to 758 | 751.25 | 756.75 | 757.25 | 757.75 |
| | 57 | 44 | 758 to 766 | 759.25 | 764.75 | 765.25 | 765.75 |
| | 58 | 45 | 766 to 774 | 767.25 | 772.75 | 773.25 | 773.75 |
| | 59 | 46 | 774 to 782 | 775.25 | 780.75 | 781.25 | 781.75 |
| | 60 | 47 | 782 to 790 | 783.25 | 788.75 | 789.25 | 789.75 |
| | 61 | 48 | 790 to 798 | 791.25 | 796.75 | 797.25 | 797.75 |
| | 62 | 49 | 798 to 806 | 799.25 | 804.75 | 805.25 | 805.25 |
| | 63 | 50 | 806 to 814 | 807.25 | 812.75 | 813.25 | 813.25 |
| | 64 | 51 | 814 to 822 | 815.25 | 820.75 | 821.25 | 821.25 |
| | 65 | 52 | 822 to 830 | 823.25 | 828.75 | 829.25 | 829.25 |
| | 66 | 53 | 830 to 838 | 831.25 | 836.75 | 837.25 | 837.25 |
| | 67 | 54 | 838 to 846 | 839.25 | 844.75 | 845.25 | 845.25 |
| | 68 | 55 | 846 to 854 | 847.25 | 852.75 | 853.25 | 853.75 |
| | 69 | 56 | 854 to 862 | 855.25 | 860.75 | 861.25 | 861.75 |
| | | | 57 | 862 to 870 | 863.25 | | |
| | not | 58 | 870 to 878 | 871.25 | | | 877.75 |
| | defi | 59 | 878 to 886 | 879.25 | | | 885.75 |
| | ned | 60 | 886 to 894 | 887.25 | | | 893.75 |
| | | 61 | 894 to 902 | 895.25 | | | 901.75 |
| | | 62 | 902 to 910 | 903.25 | | | 909.75 |

EU = EUROPE

Chi = CHINA



| BAND | CHANNEL | | CHANNEL LIMITS MHZ | VISION CARRIER | SOUND CARRIER |
|--|------------|------------|---------------------------------------|-------------------|---------------|
| | USA Can | Jap | | | |
| Standards M,N (6 Mhz), USA;Standards M (6 Mhz) Japan | | | | | |
| IF | - | - | same as VHF for corresponding country | | |
| IV | 14 | 13 | 470 to 476 | 471.25 | 475.75 |
| | 15 | 14 | 476 to 482 | 477.25 | 481.75 |
| other channels with 6 Mhz spacing | | | | | |
| V | 41 | 40 | 632 to 638 | 633.25 | 637.75 |
| | 42 | 41 | 638 to 644 | 639.25 | 643.75 |
| | 43 | 42 | 644 to 650 | 645.25 | 649.75 |
| | 44 | 43 | 650 to 656 | 651.25 | 655.75 |
| | 45 | 44 | 656 to 662 | 657.25 | 661.75 |
| | 46 | 45 | 662 to 668 | 663.25 | 667.75 |
| | 47 | 46 | 668 to 674 | 669.25 | 673.75 |
| | 48 | 47 | 674 to 680 | 675.25 | 679.75 |
| | 49 | 48 | 680 to 686 | 681.25 | 685.75 |
| | 50 | 49 | 686 to 692 | 687.25 | 691.75 |
| | 51 | 50 | 692 to 698 | 693.25 | 697.75 |
| | 52 | 51 | 698 to 704 | 699.25 | 703.75 |
| | 53 | 52 | 704 to 710 | 705.25 | 709.75 |
| | 54 | 53 | 710 to 716 | 711.25 | 715.75 |
| | 55 | 54 | 716 to 722 | 717.25 | 721.75 |
| | 56 | 55 | 722 to 728 | 723.25 | 727.75 |
| | 57 | 56 | 728 to 734 | 729.25 | 733.75 |
| | 58 | 57 | 734 to 740 | 735.25 | 739.75 |
| | 59 | 58 | 740 to 746 | 741.25 | 745.75 |
| | 60 | 59 | 746 to 752 | 747.25 | 751.75 |
| 61 | 60 | 752 to 758 | 753.25 | 757.75 | |
| 62 | 61 | 758 to 764 | 759.25 | 763.75 | |
| 63 | 62 | 764 to 770 | 765.25 | 769.75 | |
| 64 | | 770 to 776 | 771.25 | 775.75 | |
| 65 | not | 776 to 782 | 777.25 | 781.75 | |
| 66 | defi | 782 to 790 | 783.25 | 787.75 | |
| 67 | ned | 788 to 794 | 789.25 | 793.75 | |



| BAND | CHANNEL | | CHANNEL LIMITS MHZ | VISION CARRIER | SOUND CARRIER |
|------|------------|-----|-----------------------|-------------------|---------------|
| | USA Can | Jap | | | |

Standards M,N (6 Mhz), USA;Standards M (6 Mhz) Japan

| | | | | | |
|----|----|------------|------------|--------|--------|
| V | 68 | | 794 to 800 | 795.25 | 799.75 |
| | 69 | | 800 to 806 | 801.25 | 805.75 |
| | 70 | | 806 to 812 | 807.25 | 811.75 |
| | 71 | | 812 to 818 | 813.25 | 817.75 |
| | 72 | | 818 to 824 | 819.25 | 823.75 |
| | 73 | | 824 to 830 | 825.25 | 829.75 |
| | 74 | not | 824 to 830 | 831.25 | 835.75 |
| | 75 | defi | 830 to 836 | 837.25 | 841.75 |
| | 76 | ned | 836 to 842 | 843.25 | 847.75 |
| | 77 | | 842 to 848 | 849.25 | 853.75 |
| | 78 | | 848 to 854 | 855.25 | 859.75 |
| | 79 | | 854 to 860 | 861.25 | 865.75 |
| | 80 | | 860 to 866 | 867.25 | 871.75 |
| | 81 | | 866 to 872 | 873.25 | 877.75 |
| | 82 | | 878 to 884 | 879.25 | 883.75 |
| 83 | | 884 to 890 | 885.25 | 889.75 | |

Standard B (7 Mhz), Australia

| | | | | | |
|----|----|--|----------------|--------|--------|
| IF | - | | 33.15 to 40.15 | 38.9 | 33.4 |
| IV | 28 | | 526 to 533 | 527.25 | 532.75 |
| | 29 | | 533 to 540 | 534.25 | 539.75 |
| | 30 | | 540 to 547 | 541.25 | 546.75 |
| | 31 | | 547 to 554 | 548.25 | 553.75 |
| | 32 | | 554 to 561 | 555.25 | 560.75 |
| | 33 | | 561 to 568 | 562.25 | 567.75 |
| | 34 | | 568 to 575 | 569.25 | 574.75 |
| | 35 | | 575 to 582 | 576.25 | 581.75 |
| | 36 | | 582 to 589 | 583.25 | 588.75 |
| | 37 | | 589 to 596 | 590.25 | 595.75 |
| | 38 | | 596 to 603 | 597.25 | 602.75 |
| | 39 | | 603 to 610 | 604.25 | 609.75 |
| | 40 | | 610 to 617 | 611.25 | 616.75 |



| BAND | CHANNEL | CHANNEL LIMITS MHZ | VISION CARRIER | SOUND CARRIER |
|--------------------------------------|---------|-----------------------|-------------------|---------------|
| <i>Standard B (7 Mhz), Australia</i> | | | | |
| | 41 | 617 to 624 | 618.25 | 623.75 |
| | 42 | 624 to 631 | 625.25 | 630.75 |
| | 43 | 631 to 638 | 632.25 | 637.75 |
| | 44 | 638 to 645 | 639.25 | 644.75 |
| | 45 | 645 to 652 | 646.25 | 651.75 |
| | 46 | 652 to 659 | 653.25 | 658.75 |
| | 47 | 659 to 666 | 660.25 | 665.75 |
| | 48 | 666 to 673 | 667.25 | 672.75 |
| | 49 | 673 to 680 | 674.25 | 679.75 |
| | 50 | 680 to 687 | 681.25 | 686.75 |
| | 51 | 687 to 694 | 688.25 | 693.75 |
| | 52 | 694 to 701 | 695.25 | 700.75 |
| | 53 | 701 to 708 | 702.25 | 707.75 |
| | 54 | 708 to 715 | 709.25 | 714.75 |
| | 55 | 715 to 722 | 716.25 | 721.75 |
| | 56 | 722 to 729 | 723.25 | 728.75 |
| | 57 | 729 to 736 | 730.25 | 735.75 |
| | 58 | 736 to 743 | 737.25 | 742.75 |
| | 59 | 743 to 750 | 744.25 | 749.75 |
| | 60 | 750 to 757 | 751.25 | 756.75 |
| | 61 | 757 to 764 | 758.25 | 763.75 |
| | 62 | 764 to 801 | 765.25 | 770.75 |
| | 63 | 771 to 779 | 772.25 | 777.75 |
| | 64 | 778 to 786 | 779.25 | 784.75 |
| | 65 | 785 to 793 | 786.25 | 791.75 |
| | 66 | 792 to 799 | 793.25 | 798.75 |
| | 67 | 799 to 806 | 800.25 | 805.75 |
| | 68 | 806 to 813 | 807.25 | 812.75 |
| | 69 | 813 to 820 | 814.25 | 819.75 |

USA = United States of America

Can = Canada

Jap = Japan



Basic standards for TV transmission

| STANDARD | | B/G CCIR | D/K OIRT | H BELGIUM |
|--|-------|---|---------------------------------|---------------------------------|
| Frequency | | VHF/UHF | VHF/UHF | UHF |
| Number of lines for frame | | 625 | 625 | 625 |
| Field frequency | Hz | 50 | 50 | 50 |
| Line frequency | Hz | 15625 | 15625 | 15625 |
| Duration of line sync pulse | µs | 4.7 | 4.7 | 4.7 |
| Duration of line blanking pulse | µs | 12 | 12 | 12 |
| Front porch | µs | 1.5 | 1.5 | 1.5 |
| Field blanking interval | Lines | 25 | 25 | 25 |
| Standard color system | | PAL/SECAM | SECAM | PAL/SECAM |
| Chrominance subcarrier freq. | Hz | | | |
| PAL | Hz | 4433618.75±5 | | 4433618.75±5 |
| SECAM/NTSC | Hz | $f_{OR}=4406250±2000$ | $f_{OR}=4406250±2000$ | $f_{OR}=4406250±2000$ |
| | | $f_{OB}=4250000±2000$ | $f_{OB}=4250000±2000$ | $f_{OB}=4250000±2000$ |
| | kHz | $(f_O=4286±20)$ | $(f_O=4286±20)$ | $(f_O=4286±20)$ |
| | | $f_{OR}=282f_H$ $f_{OB}=272f_H$ | $f_{OR}=282f_H$ $f_{OB}=272f_H$ | $f_{OR}=282f_H$ $f_{OB}=272f_H$ |
| Video bandwidth | Mhz | 5 | 6 | 5 |
| RF channel width | Mhz | 7(B) / 8(G) | 8 | 8 |
| Vision-sound carrier spacing | Mhz | +5.5 +5.74 ⁶ | +6.5 | +5.5 |
| Width of vestigial sideband | Mhz | 0.75 | 0.75 | 1.25 |
| Spacing of vision carrier from nearest edge of channel | Mhz | +1.25 | +1.25 | +1.25 |
| RF sync level | % | 100 | 100 | 100 |
| RF blanking level | % | 733 | 75 | 75 |
| RF white level (residual carrier) | % | 10 | 12.5 | 10 |
| Type of vision modulation | | C3F neg. | C3F neg. | C3F neg. |
| Type of sound modulation | | F3E F3EH ⁶ | F3E | F3E |
| Frequency deviation | | ±50 | ±50 | ±50 |
| Preemphasis | µs | 50 | 50 | 50 |
| Vision/Sound power ratio | | 10:1 to 20:1 ⁴ 20:1:0.2 ⁶ | 10:1 to5:1 | 5:1 to10:1 |

* = group of territories represented by the French Overseas Post and Telecommunication Agency

2 = for colour transmission according to NTSC or SECAM

3 = 73% instead of nominal 75% applies for TV transmitters of high quality also in the sync range (burst, chrominance signal)

4 = 20:1 in the Federal Republic of Germany as of April 1976 for all transmission of the three programs

5 = 6.7:1 and 2.9:1 in Japan

6 = for dual-sound or stereo sound in the Federal Republic of Germany



| I UK | K1 OR K FOPTA * | L FRANCE | M FCC | N SOUTH AMERICA |
|--------------|--|--|--------------------------|--------------------|
| VHF/UHF | VHF/UHF | VHF/UHF | VHF/UHF | VHF/UHF |
| 625 | 625 | 625 | 525 | 625 |
| 50 | 50 | 50 | 60 | 50 |
| 15625 | 15625 | 15625 | 15750 | 15625 |
| 4.7 | 4.7 | 4.7 | 5 (4.7) ² | 5 |
| 12 | 12 | 12 | 10.8 (11) ² | 10.9 |
| 1.5 | 1.5 | 1.5 | 1.9 (1.75) ² | 1.9 |
| 25 | 25 | 25 | 19 to 21 | 19 to 25 |
| PAL | SECAM | SECAM | PAL/NTSC | PAL |
| 4433618.75±5 | | | 3575611.49±10 | 3582056.25±5 |
| | f _{OR} =4406250±2000 f _{OB} =4250000±2000 (f _O =4286±20) f _{OR} =282f _H f _{OB} =272f _H | f _{OR} =4406250±2000 f _{OB} =4250000±2000 (f _O =4286±20) f _{OR} =282f _H f _{OB} =272f _H | 3579545±10 | |
| 5.5 | 6 | 6 | 4.2 | 4.2 |
| 8 | 8 | 8 | 6 | 6 |
| +6 | +6.5 | ±6.5 | +4.5 | +4.5 |
| 1.25 | 1.25 | 1.25 | 0.75 | 0.75 |
| +1.25 | +1.25 | +1.25 | +1.25 | +1.25 |
| 100 | 100 | <6 | 100 | 100 |
| 76 | 75 | 30 | 75 | 75 |
| 20 | 10 | 100 (110) ² | 10 | 10 |
| C3F neg. | C3F neg. | C3F pos. | C3F neg. | C3F neg. |
| F3E | F3E | A3E | F3E | F3E |
| ±50 | ±50 | - | ±25 | ±25 |
| 50 | 50 | - | 75 | 75 |
| 5:1 | 10:1 | 10:1 | 10:1 to 5:1 ⁵ | 10:1 to 5:1 |



Minimum field strength for which protection may be sought in planning a television service

(Ref.: CCIR Rec. 417-3)

- When planning a television service in bands I, III, IV, V, the median field strength for which protection against interference is planned should never be lower than:

| BAND | I | III | IV | V |
|------------------|----------|------------|--------------------|--------------------|
| <i>dB (μV/m)</i> | +48 | +55 | +65 ⁽¹⁾ | +70 ⁽¹⁾ |

⁽¹⁾ The values shown for band IV and V should be increased by 2 dB for the 625-line (OIRT) system

These values refers to the field strength at a height of 10m above ground level;

- The percentage of time for which the protection may be sought should lie between 90% and 99%

Note1. In arriving at the figure shown above, it has been assumed that, in the absence of interference from other television transmissions and man-made noise, the minimum field strength at the receiving antenna that will give a satisfactory grade of picture, taking into consideration receiver noise, cosmic noise, antenna gain and feeder loss, are: +47dB(μV/m) in Band I, +53 dB(μV/m) in Band III, +62 dB(μV/m) in Band IV and +67 dB(μV/m) in Band V

Note 2. Further information concerning the planning of television service for sparsely populated regions is contained in CCIR report 409.

Note 3. In a practical plan, because of interference from other television transmissions, the field strengths that can be protected will generally be higher than those quoted above, and the exact values to be used in the boundary areas between any two countries should be agreed between the administrations concerned.



Boundaries of the television service area in rural districts having a low population density

(Ref.: CCIR Rep. 409 - 4)

Where television services are to be provided for a sparsely populated region, in which better receivers and antenna installation are likely to be employed than those considered in CCIR Rec. 417, administrations may find it desirable to establish the appropriate median field strength for which protection against interference is planned as low as shown below.

| BAND | I | III | IV | V |
|------------------------|------------|------------|------------|------------|
| <i>dB(μV/m)</i> | +46 | +49 | +58 | +64 |

These values refer to the field strength at a height of 10 m above ground level.

In the absence of interference other than noise, field strength of the order of 40 dB(μV/m) in Band I, 43 dB(μV/m) in Band III, 52 dB(μV/m) in Band IV, 58 dB(μV/m) in Band V can give satisfactory pictures; however, it is generally observed that the public begin to lose interest in installing television reception equipment when the field strength falls much below these levels.

The values given in this Report have been obtained from field-strength investigations at the edge of the coverage area and picture quality assessments for Bands I and III in rural districts of Australia [CCIR, 1963-66], India [CCIR, 1974-78] and Italy, for Bands IV, and V at both rural and urban location in Italy and the United Kingdom [CCIR, 1982-86]. It may be noted that in Bands IV and V where man-made noise is not generally a problem, the field strength values quoted for rural areas, may also be applied in urban areas.



CO-Channel interference

(Ref.: CCIR Rec. 655)

The protection ratios between two television signals apply only for interference due to the modulated vision carrier of the unwanted signal. Additional protection may be necessary if the wanted sound carrier is affected, or if the unwanted sound carrier lies within the wanted vision channel (e.g. the unwanted sound carrier of the system G lies within the vision channel of system K). For all protection ratio figures in this section, the following correction have to be made:

When the wanted signal is modulated negatively and the unwanted signal is modulated positively (L/SECAM), the values should be increased by 2 dB.

When the wanted signal is modulated positively and the unwanted signal is modulated negatively, the values should be reduced by 2 dB.

Correction is not necessary if the wanted and unwanted signals have the same modulation polarity.

- ◇ Carriers separated by less than 1000 Hz, non-controlled systems having the same or different line standard:
 - ◆ Protection ratio: 45 dB, tropospheric interference
- ◇ Carriers separated by parts of the line frequency, systems having the same line-standard, non-precision offset:

Protection ratio, tropospheric interference carrier separation up to about $\pm 36/12 f_{\text{line}}$ (about $\pm 50\text{kHz}$) where f_{line} =line frequency

| OFFSET OF LINE FREQUENCY | 1/2,3/2,5/2,..... | 1/3,2/3,4/3,..... |
|--------------------------|-------------------|-------------------|
| 625-line system (dB) | 27 | 30 |
| 525-line system (dB) | 25 | 28 |

- ◇ 625-line system, carriers separated by multiples of a twelfth of the line frequency up to about $\pm 36/12 f_{\text{line}}$ (about $\pm 50\text{ kHz}$):



These protection ratio values do not necessarily apply for greater carrier separations.

Protection ratio between 625-line systems:

| OFFSET (MULTIPLES OF 1/12 LINE FREQUENCY) | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|---|-----------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|-----------|-----------|
| Non precision offset Transmitter stability ± 500 Hz | Tropospheric interference (dB) | 45 | 44 | 40 | 34 | 30 | 28 | 27 | 28 | 30 | 34 | 40 | 44 | 45 |
| | Continuous interference (dB) | 52 | 51 | 48 | 44 | 40 | 36 | 33 | 36 | 40 | 44 | 48 | 51 | 52 |
| | Limit of perceptibility (dB) | 61 | 60 | 57 | 54 | 50 | 45 | 42 | 45 | 50 | 54 | 57 | 60 | 61 |
| Precision offset Transmitter stability ± 1 Hz | Tropospheric interference (dB) | 32 | 34 | 30 | 26 | 22 | 22 | 24 | 22 | 22 | 26 | 30 | 34 | 38 |
| | Continuous interference (dB) | 36 | 38 | 34 | 30 | 27 | 27 | 30 | 27 | 27 | 30 | 34 | 38 | 42 |
| | Limit of perceptibility (dB) | 42 | 44 | 40 | 36 | 36 | 39 | 42 | 39 | 36 | 36 | 40 | 44 | 48 |

Limit of perceptibility - only for information. (Value in the first column is only valid for the 0/12 case. All other values between 1/12 and 12/12 are the same by addition or subtraction of integral multiples of 12/12 up to ±36/12).




Frequency offset conditions

The required protection ratio varies considerably depending on the frequency relationship between the wanted and the unwanted carriers and their frequency tolerance. The greatest protection is required when the frequency of one or both carriers is non-controlled.

Less interference is possible and therefore lower protection ratios are required for non precision offset (line frequency offset). Non-precision offset takes advantage of the line frequency structure of the video signal and, in particular, it is advantageous to offset the carriers by multiples of one-half or one-third of the line frequency. The long-term stability of these favourable protection ratios can only be guaranteed, however, if the frequencies of the wanted and unwanted signals are kept within $\pm 500\text{Hz}$.

Precision offset takes further advantage of the field frequency structure of the video spectrum. The least protection is required when both carriers are precision offset controlled within a tolerance of $\pm 1\text{ Hz}$ for the wanted and unwanted carriers. In the following figure is shown the main characteristic of offset operation which plots in schematic form the protection ratio curves between $0/12 f_{\text{line}}$ and $12/12 f_{\text{line}}$. These curves are cyclic and their extensions to the left and the right are symbolized by broken lines. These various conditions illustrated are similar within the luminance range up to about $\pm 3\text{ Mhz}$.

The upper and lower curves indicate, respectively, the protection ratio obtained with non-precision and precision offset. More precisely, these two curves trace the envelope of a series of fluctuations in the protection ratio which swings between the two curves at field frequency as represented by the thin line.

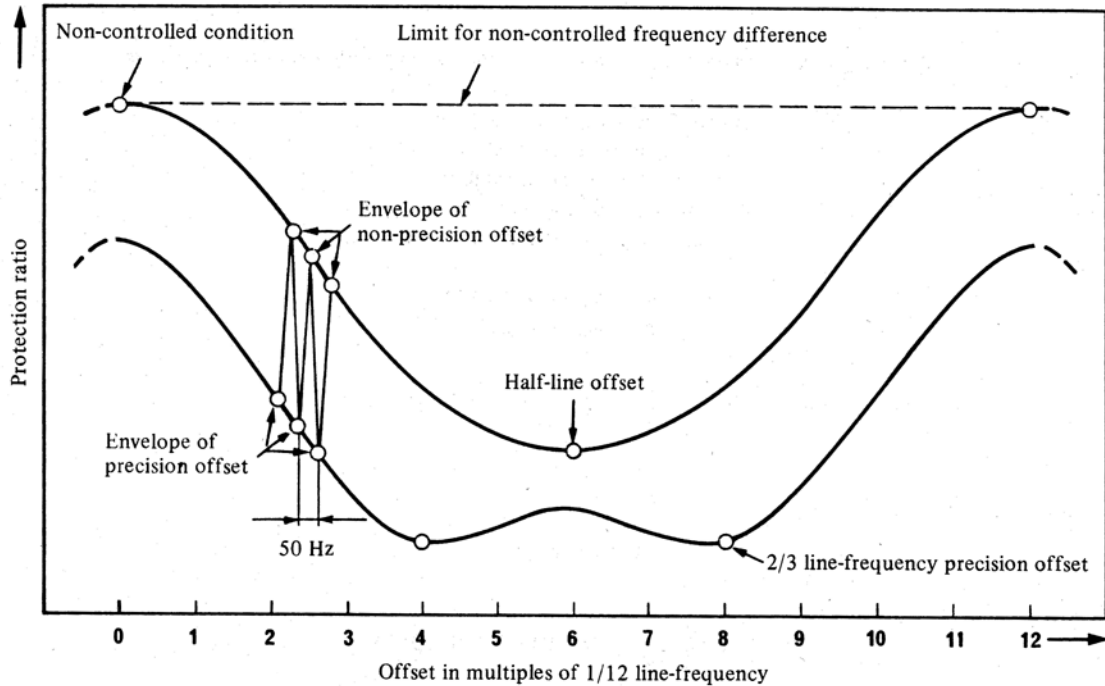


Schematic protection ratio curves with different offset positions

CO-Channel protection ratio curves in the vicinity of 0/12, 4/12 and 6/12 line frequency (625-line system)

The following figure gives examples of protection ratio curves for the three most important offset position (0/12, 4/12 and 6/12 f_{line}). The curves in each graph relate to the tropospheric interference, continuous interference and the limit of perceptibility.

The white and black points indicate the positions for non precision and precision offset respectively . The reference impairment points for tropospheric and continuous interference are also indicated in the figure.

When operating TV transmitter networks with synchronized as well as phase locked carriers, the protection ratio values are slightly reduced.

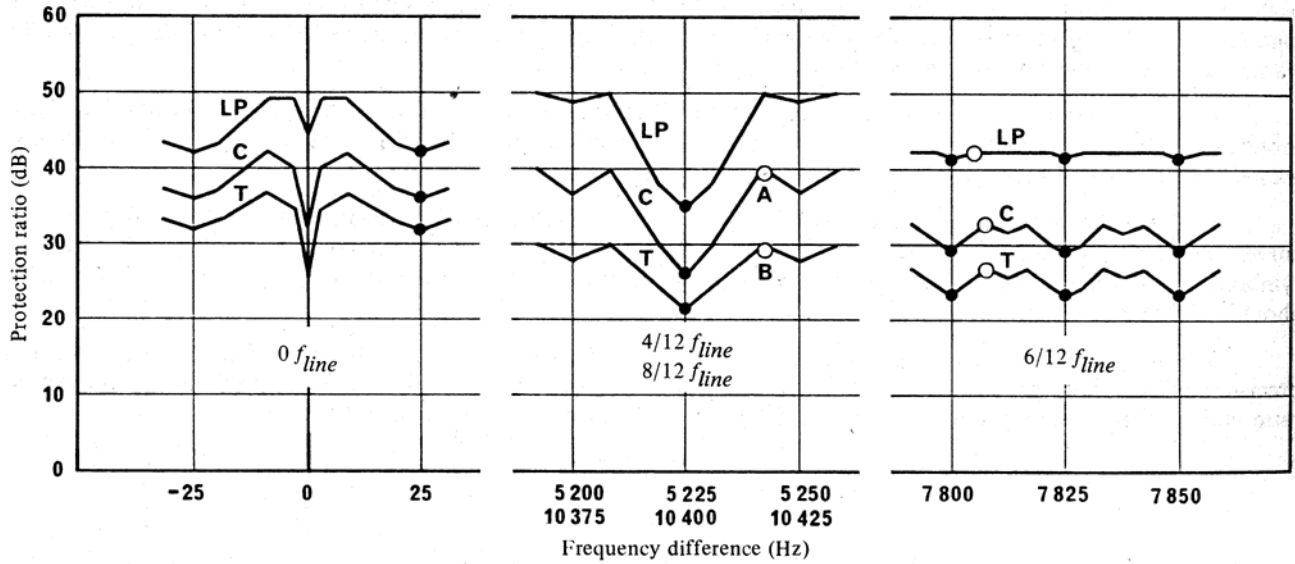

Precise structure of the protection ratio curves for different offset positions


Curves T: tropospheric interference
 C: continuous interference
 LP: limit of perceptibility
 A: continuous interference reference point
 B: tropospheric interference reference point

- Non-precision offset
- Precision offset

Directivity of antennas in the reception of television broadcasting

(Ref.: CCIR Rec. 419-1)

Characteristics of directivity of the receiving antennas that can be used for planning terrestrial television services in broadcasting Bands I, III, IV and V.

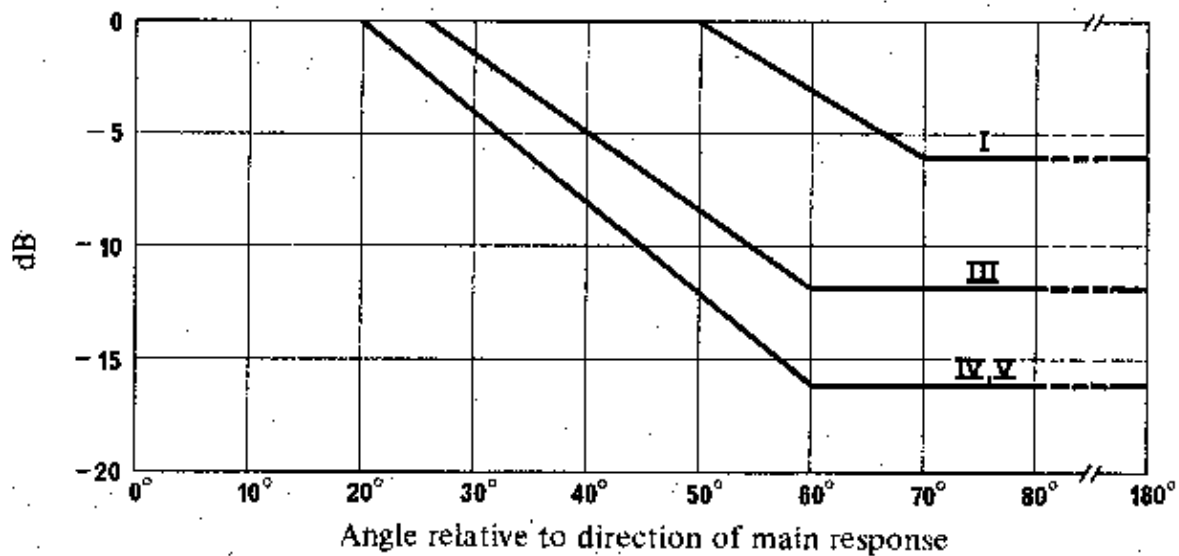

Discrimination obtained by the use of directional receiving antennas in broadcasting

(The number of the broadcasting band is shown on the curve)

- ◇ It is considered that the discrimination shown will be available at the majority of antenna location in built-up areas. At clear sites in open country, slightly higher values will be obtained.
- ◇ The curves shown above are valid for signals of vertical or horizontal polarization, when both the wanted and the unwanted signals have the same polarization.



Microwave radiation exposure - principal safety standards

Frequency range:

- ◇ USAS C95.1 - 10 Mhz - 100 Ghz
- ◇ Military - all microwave frequencies - range not specified
- ◇ USSR - 300 Mhz to 30 Ghz
- ◇ Czech - 300 Mhz to 300 Ghz

Definition of Power Density:

Power Densities referred to in standards is that average density measured in accessible regions (USASI, or military) or at actual exposure sites (USSR and Czech) in the absence of subject.

Averaging time:

USAS C95.1 - 0.1 hour or 6 minutes

AF and ARMY - 0.01 hour or 36 seconds

Navy - 3 seconds

USSR - not specified

Czech - not specified, but the standard implies that an average density is calculated from an integrated dose. For example, for occupational situations the maximum permissible exposure is given by:

$$\int_0^8 PdT < 200 \text{ microwatts / cm}^2 \text{ - hours}$$

averaged over 8 hours where P is power density and T is time in hour. The total exposure dose over five consecutive working days is summed and divided by 5 to obtain an average exposure dose for 8 hours.

Dependence on Area of Exposure:

No distinctions are generally made between partial and whole body exposure.

Modification for Pulse or Other Modulation:

None except for reduction of exposure level by a factor of 2.5 in Czech standards.



Restriction on Peak Power:

None.


Allowance for Environment:

None except for proposal by Mumford to reduce the radiation exposure guide from 10 mw/cm² according to the formula $P_o(\text{mw/cm}^2) = 10 - (\text{THI} - 70)$ for values of the temperature-humidity index (THI) in the range of 70 to 79 with $P_o = 1 \text{ mw/cm}^2$ for THI above 79.

Instrumentation:

Generally not well specified but far-field type probes such as small horns or open waveguides are specified with effective apertures $A_e = \lambda^2 / 4\pi G$ where G is the power gain. Response times are not well specified but are implied to be much greater than pulse durations and much smaller than duration of exposure, generally of the order of seconds. Some use of true dosimetry, integrated absorbed energy is made in USSR and Czechoslovakia.

Under USSR standard exposure near 1 mW/cm² is permitted only with use of protective goggles for the eyes.

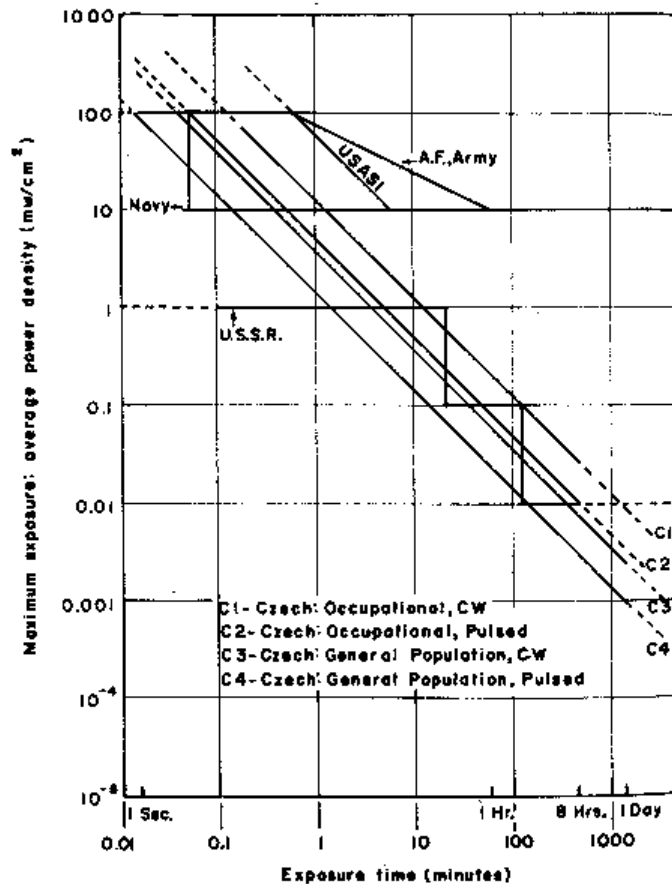



Coaxial cables

| CABLE TYPE | IMPEDANCE Ω | DIELECTRIC | VELOCITY FACTOR | FREQUENCY [MHZ] | | | |
|------------|-----------------------|---------------------------|-----------------|---|-------|-------|-------|
| | | | | MAXIMUM POWER [KW] / ATTENUATION [DB/100 M] | | | |
| | | | | 50 | | 100 | |
| | | | | Kw | dB | Kw | dB |
| RG 58 | 50 | Compact Polythene | 0.67 | 0.42 | 10.8 | 0.3 | 16.1 |
| RG 59 | 75 | Compact Polythene | 0.66 | 0.75 | 8.0 | 0.50 | 11.2 |
| RG 213 | 50 | Compact Polythene | 0.66 | 2.7 | 4.27 | 1.7 | 6.23 |
| RG 8 | 52 | Compact Polythene | 0.66 | 2.7 | 4.27 | 1.7 | 6.23 |
| RG 11 | 75 | Compact Polythene | 0.66 | 1.7 | 4.80 | 1.03 | 7.0 |
| 1/4 Inch | 50 | Expanded Polythene (FOAM) | 0.84 | 0.985 | 4.17 | 0.690 | 5.94 |
| 1/2 Inch | 50 | Expanded Polythene (FOAM) | 0.81 | 2.91 | 2.40 | 2.03 | 3.44 |
| 7/8 Inch | 50 | Expanded Polythene (FOAM) | 0.89 | 7.74 | 0.843 | 5.38 | 1.21 |
| 1+5/8 Inch | 50 | Expanded Polythene (FOAM) | 0.88 | 19.3 | 0.512 | 13.4 | 0.738 |
| 1/2 Inch | 50 | Air Dielectric | 0.914 | 2.97 | 1.90 | 2.10 | 2.72 |
| 5/8 Inch | 50 | Air Dielectric | 0.92 | 6.00 | 1.12 | 4.21 | 1.60 |
| 7/8 Inch | 50 | Air Dielectric | 0.90 | 9.20 | 0.853 | 6.40 | 1.21 |
| 1+5/8 Inch | 50 | Air Dielectric | 0.921 | 20.7 | 0.476 | 14.4 | 0.679 |
| 3 Inch | 50 | Air Dielectric | 0.933 | 54.0 | 0.322 | 29.1 | 0.448 |
| 4 Inch | 50 | Air Dielectric | 0.92 | 82.0 | 0.256 | 56.0 | 0.371 |
| 5 Inch | 50 | Air Dielectric | 0.931 | 107 | 0.177 | 73.0 | 0.259 |



| FREQUENCY [MHZ] | | | | | | | | | | | | | |
|---|-------|-------|-------|-------|-------|-------|------|-------|------|-------|-------|-------|------|
| Maximum power [Kw] / Attenuation [dB/100 m] | | | | | | | | | | | | | |
| 200 | | 500 | | 800 | | 1000 | | 2000 | | 3000 | | 8000 | |
| Kw | dB | Kw | dB | Kw | dB | Kw | dB | Kw | dB | Kw | dB | Kw | dB |
| 0.2 | 24.3 | 0.18 | 39.6 | 0.14 | 39.8 | 0.125 | 55.0 | 0.08 | 75.0 | 0.62 | 111.5 | - | - |
| 0.35 | 16.1 | 0.23 | 27.0 | 0.17 | 37.0 | 0.15 | 43.0 | 0.09 | 68.0 | 0.07 | 85.0 | - | - |
| 1.1 | 8.86 | 0.65 | 17.0 | 0.48 | 23.0 | 0.40 | 26.0 | 0.30 | 43.0 | 0.19 | 57.0 | - | - |
| 1.1 | 8.86 | 0.65 | 17.0 | 0.48 | 23.0 | 0.40 | 26.0 | 0.30 | 43.0 | 0.19 | 57.0 | - | - |
| 0.81 | 10.03 | 0.48 | 17.0 | 0.36 | 25.0 | 0.30 | 29.0 | 0.19 | 46.0 | 0.15 | 60.0 | - | - |
| 0.482 | 8.46 | 0.298 | 13.7 | 0.231 | 17.5 | 0.205 | 19.7 | 0.14 | 28.6 | 0.111 | 35.8 | 0.062 | 62.7 |
| 1.42 | 4.92 | 0.867 | 8.06 | 0.669 | 10.4 | 0.59 | 11.7 | 0.4 | 17.4 | 0.318 | 22.1 | 0.166 | 42.0 |
| 3.72 | 1.76 | 2.25 | 2.90 | 1.73 | 3.78 | 1.52 | 4.30 | 1.01 | 6.46 | 0.785 | 8.31 | - | - |
| 9.22 | 1.08 | 5.53 | 1.79 | 4.21 | 2.36 | 3.69 | 2.69 | 2.42 | 4.10 | - | - | - | - |
| 1.48 | 3.90 | 0.924 | 6.13 | 0.720 | 7.77 | 0.640 | 8.69 | 0.44 | 12.6 | 0.338 | 16.2 | 0.175 | 32.2 |
| 2.94 | 2.29 | 1.82 | 3.71 | 1.41 | 4.76 | 1.25 | 5.37 | 0.858 | 7.86 | 0.682 | 9.89 | - | - |
| 4.40 | 1.77 | 2.69 | 2.85 | 2.09 | 3.68 | 1.85 | 4.17 | 1.30 | 6.07 | 1.0 | 7.90 | - | - |
| 10.0 | 0.951 | 6.21 | 1.57 | 4.82 | 2.03 | 4.30 | 2.30 | 2.90 | 3.44 | - | - | - | - |
| 25.0 | 0.682 | 14.6 | 1.2 | 9.24 | 1.60 | 9.30 | 1.84 | - | - | - | - | - | - |
| 38.7 | 0.545 | 22.6 | 0.943 | 17.1 | 1.24 | 15.0 | 1.41 | - | - | - | - | - | - |
| 51.0 | 0.377 | 30.7 | 0.626 | 23.0 | 0.820 | - | - | - | - | - | - | - | - |

Wave guides

| GUIDE TYPE | TE ₁₁ MODE CUTOFF [GHZ] | MAXIMUM FREQ. RANGE [GHZ] | ATTENUATION [DB/100 M] | MAX POWER [W] | VELOCITY FACTOR |
|------------|------------------------------------|---------------------------|------------------------|---------------|-----------------|
| EW 127 A | 7.67 | 10.0 - 13.25 | 11.83 | 1.24 | 0.78 |
| EW 132 | 9.22 | 11.0 - 15.35 | 15.84 | 0.85 | 0.78 |



TV analogue microwave links

SYSTEM STANDARD

| | |
|--|---|
| IF FREQUENCY: | 70 Mhz |
| MODULATION TYPE: | F.M. |
| NOMINAL FREQUENCY DEVIATION: | 8 Mhz p.p. (REC. 276-2) |
| PREEMPHASIS / DEEMPHASIS: | 525 Lines Standard or 625 Lines Standard (REC. 405 - 1) |
| STANDARD AUDIO CARRIERS | |
| FREQUENCY: | 7.500 Mhz (1°) |
| 8.590 Mhz | |
| | 7.020 Mhz |
| 8.65Mhz | |
| (REP. 289-4) | |
| AUDIO SUBCARRIER MODULATION | |
| TYPE: | F.M. |
| STANDARD NOMINAL MAXIMUM AUDIO SUBCARRIER DEVIATION | |
| (with audio signal): | $\pm 100 \text{ Khz p.}$ |
| STANDARD AUDIO SUBCARRIER PREEMPHASIS: | |
| | 50 μ S |



VSWR vs. Return loss (dB)

| VSWR | RETURN LOSS (DB) |
|-------|------------------|
| 1.00 | ∞ |
| 1.05 | 32.3 |
| 1.10 | 26.4 |
| 1.15 | 23.1 |
| 1.20 | 20.8 |
| 1.22 | 20.1 |
| 1.25 | 19.1 |
| 1.30 | 17.7 |
| 1.40 | 15.6 |
| 1.50 | 14.0 |
| 1.70 | 11.7 |
| 1.92 | 10.0 |
| 2.00 | 9.5 |
| 3.00 | 6.0 |
| 6.00 | 2.9 |
| 10.00 | 1.7 |

Half wave dipole vs. isotropic dipole

Half wave dipole gain (with reference to isotropic radiator) \cong 2.2 dB

Units:

Antenna gain (with reference to isotropic radiator): dBi

Antenna gain (with reference to half wave dipole): dBd

Generally: $\text{dBd} = \text{dBi} - 2.2$



Relationship between dBm, W, dB μ V, V

| dBm | POWER | DBμV | VOLTAGE |
|------------|--------------|----------------------------|----------------|
| -100 | 0.1 pW | 7 | 2.2 μ V |
| -90 | 1 pW | 17 | 7 μ V |
| -80 | 10 pW | 27 | 22 μ V |
| -70 | 100 pW | 37 | 70 μ V |
| -60 | 1 nW | 47 | 220 μ V |
| -50 | 10 nW | 57 | 700 μ V |
| -47 | 20 nW | 60 | 1 mV |
| -40 | 100 nW | 67 | 2.2 mV |
| -30 | 1 μ V | 77 | 7 mV |
| -20 | 10 μ V | 87 | 22 mV |
| -10 | 100 μ V | 97 | 70 mV |
| 0 | 1 mW | 107 | 220 mV |
| 10 | 10 mW | 117 | 700 mV |
| 20 | 100 mW | 127 | 2.2 V |
| 30 | 1 W | 137 | 7 V |
| 40 | 10 W | 147 | 22 V |
| 50 | 100 W | 157 | 70 V |
| 60 | 1 kW | 167 | 220 V |
| 70 | 10 kW | 177 | 700 V |
| 80 | 100 kW | 187 | 2.2 kV |
| 90 | 1 MW | 197 | 7 kV |

These values refers to 50 Ω Impedance. (For 75 Ω voltage values must be increased by 20%).



Cable size vs. maximum current

Maximum current carrying capacity for copper cable insulated with proper rubber and textile. This capacities for cable placed in free air with an ambient temperature of 35 °.

These values are for cables in free air (not banded) at any ambient.

| NOMINAL CROSS SECTION AREA | PLACED IN FREE AIR | | | | |
|-------------------------------------|--------------------|--------------|--------------|-----------------|------------------|
| | 1-pole cable | 2-pole cable | 3-pole cable | N°of conductors | Diameter (mm) |
| | mm ² | Amperes | Amperes | Amperes | |
| 0.5 | 3 | 3 | 3 | 1 | 0.8 |
| 0.75 | 5 | 5 | 5 | 1 | 1 |
| 1 | 7 | 7 | 7 | 1 | 1.15 |
| 1.5 | 10 | 10 | 10 | 1 | 1.4 |
| 2.5 | 16 | 16 | 16 | 1 | 1.8 |
| 4 | 22 | 22 | 22 | 1 | 2.25 |
| 6 | 31 | 30 | 30 | 1 | 2.8 |
| 10 | 47 | 45 | 40 | 7 | 1.35 |
| 16 | 66 | 61 | 51 | 7 | 1.7 |
| 25 | 88 | 83 | 68 | 7 | 2.15 |
| 35 | 108 | 95 | 84 | 7 | 2.5 |
| 50 | 135 | 128 | 105 | 19 | 1.8 |
| 75 | 176 | 167 | 135 | 19 | 2.25 |
| 100 | 213 | 202 | 165 | 19 | 2.6 |
| 120 | 240 | 227 | 186 | 37 | 2 |
| 150 | 280 | 263 | 217 | 37 | 2.25 |
| 180 | 325 | 300 | 245 | 37 | 2.5 |
| 200 | 375 | 320 | 260 | 37 | 2.6 |



Conversion factors

LENGTH:

| UNITS | METER | MILS | INCH | FEET | YARD | TERR. MILE (1) | NAUT. MILE(2) |
|---------------|----------|-------|-------|----------|----------|----------------|---------------|
| METER | 1 | 39370 | 39.37 | 3.281 | 1.094 | 0.000621 | 0.00054 |
| MILS | 2.540E-5 | 1 | 0.001 | 8.333E-5 | 2.778E-5 | - | - |
| INCH | 0.02540 | 1000 | 1 | 0.083 | 0.0278 | - | - |
| FEET | 0.3048 | 12000 | 12 | 1 | 0.333 | - | - |
| YARD | 0.914 | 35997 | 36 | 3 | 1 | - | - |
| TERR. MILE(1) | 1609 | - | - | 5279 | 1760 | 1 | 0.868 |
| NAUT. MILE(2) | 1853 | - | - | 6080 | 2027 | 1.151 | 1 |

(1)Terr. Mile = Terrestrial Mile; (2)Naut. Mile = Nautical Mile;

1 micron = 1E-3 millimetres;

1 angstrom = 1E-7 millimetres

PRESSURE

| UNITS | ATM.(1) | MMH ₂ O | MMHG | PA.(2) | BAR | KG/CM ² |
|--------------------|----------|--------------------|---------|----------|-----------|--------------------|
| ATM.(1) | 1 | 10332 | 760 | 101325 | 1.01327 | 1.03333 |
| MMH ₂ O | 9.68E-5 | 1 | 0.07355 | 9.81 | 9.81E-5 | 1.0003E-4 |
| MMHG | 1.316E-3 | 13.597 | 1 | 133.34 | 1.333E-3 | 1.359E-3 |
| PA.(2) | 9.87E-6 | 0.102 | 7.5E-3 | 1 | 1.0001E-5 | 1.02E-5 |
| BAR | 0.9869 | 10196.69 | 750.04 | 99998.02 | 1 | 1.02 |
| KG/CM ² | 0.9677 | 9998.74 | 735.486 | 98059.61 | 0.980 | 1 |

(1)Atm. = Atmosphere; (2)Pa. = Pascal

MASS

| UNITS | KILOGRAM | POUND | OUNCE | DYNES |
|----------|----------|----------|-------|---------|
| KILOGRAM | 1 | 2.205 | 35.27 | 980665 |
| POUND | 0.4535 | 1 | 16 | 444746 |
| OUNCE | 0.02835 | 0.0625 | 1 | 27804.5 |
| DYNES | 1.02E-6 | 2.248E-6 | 36E-6 | 1 |



TEMPERATURE

| UNITS | °C(1) | °F(2) | K(3) | °R(4) |
|-------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| °C(1) | - | $(5^{\circ}\text{F})/9-17.78$ | $\text{K}-273.15$ | $(5^{\circ}\text{R}/9)-273.17$ |
| °F(2) | $(9^{\circ}\text{C}/5)+32$ | - | $(9^{\circ}\text{K}/5)-459.67$ | $^{\circ}\text{R}-459.67$ |
| K(3) | $^{\circ}\text{C}+273.15$ | $(5^{\circ}\text{F}/9)+255.37$ | - | $(5^{\circ}\text{R})/9$ |
| °R(4) | $(9^{\circ}\text{C}/5)+491.67$ | $^{\circ}\text{F}+459.67$ | $(9^{\circ}\text{R})/5$ | - |

(1) °C = Celsius; (2) °F = Fahrenheit; K = Kelvin; °R = Rankine

ENERGY

| UNITS | BTU | CALORIE,GRAM | JOULE | ERG |
|--------------|-----------|--------------|--------|-------------|
| BTU | 1 | 252 | 1054.8 | 1.055E10 |
| CALORIE,GRAM | 3.9685E-3 | 1 | 4.1857 | 41865079.36 |
| JOULE | 9.48E-4 | 0.2389 | 1 | 1E7 |
| ERG | 9.48E-11 | 0.2389E-7 | 1E-7 | 1 |

POWER

| UNITS | WATT | BTU/HR | HP | KG-CAL/MIN |
|------------|---------|---------|----------|------------|
| WATT | 1 | 3.412 | 1.341E-3 | 0.01433 |
| BTU/HR | 0.2931 | 1 | 3.93E-4 | 4.2E-3 |
| HP | 745.712 | 2544.22 | 1 | 10.68 |
| KG-CAL/MIN | 69.78 | 238.1 | 0.0936 | 1 |



Useful formulae

Electrical formulae

Electrical power in KW:

❖ DC power [KW]: $\frac{\text{volt} \times \text{ampere}}{1000}$

❖ AC power (single phase) [KW]: $\frac{\text{volt} \times \text{ampere}}{1000} \times \cos(\varphi)$

❖ AC power (three-phase) [KW]: $1.73 \times \frac{\text{volt} \times \text{ampere}}{1000} \times \cos(\varphi)$

where:

Volt: linked voltage

Ampere: single phase current or balanced mean of the 3 cables current

All with balanced load

φ = power factor

General information

Medium radius of earth = 6371.03 Km

Equatorial radius of earth = 6376.8 Km

Polar radius of earth = 6355.41

Resistivity for some common metals:

Silver 0.0164 $\Omega \cdot \text{mm}^2/\text{m}$

Copper 0.0178 $\Omega \cdot \text{mm}^2/\text{m}$

Gold 0.0223 $\Omega \cdot \text{mm}^2/\text{m}$

Brass 0.077 $\Omega \cdot \text{mm}^2/\text{m}$



RF formulae

Wavelength in free space: $\lambda \text{ (meter)} = \frac{3E8}{\text{freq(Hz)}} = \frac{300}{\text{freq(Mhz)}}$

Reflection coefficient vs. impedance: $\Gamma = \frac{Z - Z_0}{Z + Z_0}$

◆ Z = Load impedance (Ω)

◆ Z_0 = Characteristic impedance of the line (Ω)

Voltage standing wave ratio: $VSWR = \frac{1 + |\Gamma|}{1 - |\Gamma|}$

where $|\Gamma|$ = magnitude of reflection coefficient

Reflection coefficient:

$$K = \frac{VSWR - 1}{VSWR + 1}$$

Return loss (dB) : $-K \text{ (dB)} = -20 \cdot \text{LOG}(K)$ $VSWR \text{ (dB)} = 20 \cdot \text{LOG}(VSWR)$

Ratio of power transmitted: $1 - K^2$

Loss due to VSWR : $-(1 - K^2) \text{ (dB)} = 10 \cdot \text{LOG}(1 - K^2)$



Useful RF calculation

Free space attenuation or path loss between two points:

The calculation is made assuming ideal conditions, ie:

No reflection from terrain, etc

No atmospheric (climatic) attenuation

No obstruction within the first Fresnel ellipsoid

Use of isotropic antennas at either end of the path

[A]: Frequency - Frequency for calculation expressed in MHz

[B]: Distance - Distance between transmitting and receiving antennas, in Km

Free Space Attenuation (path loss) [dB] = $20 \times \text{LOG}(A) + 20 \times \text{LOG}(B) + 32.5$

Signal \Rightarrow Field Strength

Signal field strength at the location of the receiving antenna, given the received signal level measured at the output connector of this antenna, across 50 Ohms.

[A]: Frequency- the frequency of the calculation, expressed in MHz

[B]: Rx antenna gain- the gain of the complete receiving antenna, expressed in dBd (which is the gain in dB referred to a half wavelength dipole) in the actual direction (horizontally and vertically) in which the transmitting antenna is situated.

[C]: Received signal(dBuV)- the received signal voltage expressed in dB relative to 1uV (microvolt) measured at the output connector of the receiving antenna across a resistive impedance of 50 Ohms

$$\text{Field strength [dBuV / m]} = 20 \times \text{Log} \left[10^{\left(\frac{C-B}{20}\right)} \times \left(\frac{2 \times \pi \times A}{300}\right) \right]$$



Parabolic Antenna Gain

Calculation of parabolic antenna gain, with the prime focus feed, with respect to an isotropic radiator (dBi).

[A]: Diameter - the diameter of the antenna, measured rim-to-rim directly across the parabolic reflector, expressed in metres

[B]: Frequency - the frequency for the calculation, expressed in GHz

[C]: Efficiency factor - efficiency factor for the illumination of the antenna. This takes into account the fact that the radiation from the feed does not illuminate the reflector uniformly. If the efficiency is not known, 0.55 may be assumed

$$\text{Parabolic antenna gain [dBi]} = 10 \times \text{Log} \left\{ C \times 4 \times \pi^2 \times \left[\frac{\left(\frac{A}{2} \right)^2}{\left(\frac{0.3}{B} \right)^2} \right] \right\}$$

Fresnel Zone Radius

Calculates the radius (minus axis/2 in metres) of the First Fresnel Ellipsoid at any point on the path. This is the zone which must be free from any obstruction in order to prevent attenuation, in excess of the free space value, caused by reflection from obstructions.

[A]: Path length - the direct distance between the transmitting and receiving antennas, measured in a straight line, expressed in Km

[B]: Distance from calculation point to path end - it is the distance from calculation point to the path end, measured horizontally in a straight line, expressed in Km.

[C]: Frequency - the frequency for the calculation, expressed in GHz

1st Fresnel zone radius over obstacle:

$$[m] = \frac{\sqrt{\left(\frac{0.3}{C}\right) \times B \times 1000 \times (A - B) \times 1000 \times \left(\frac{1}{A \times 1000}\right)}}{2}$$

